


Configuration of scanners (Active mode)

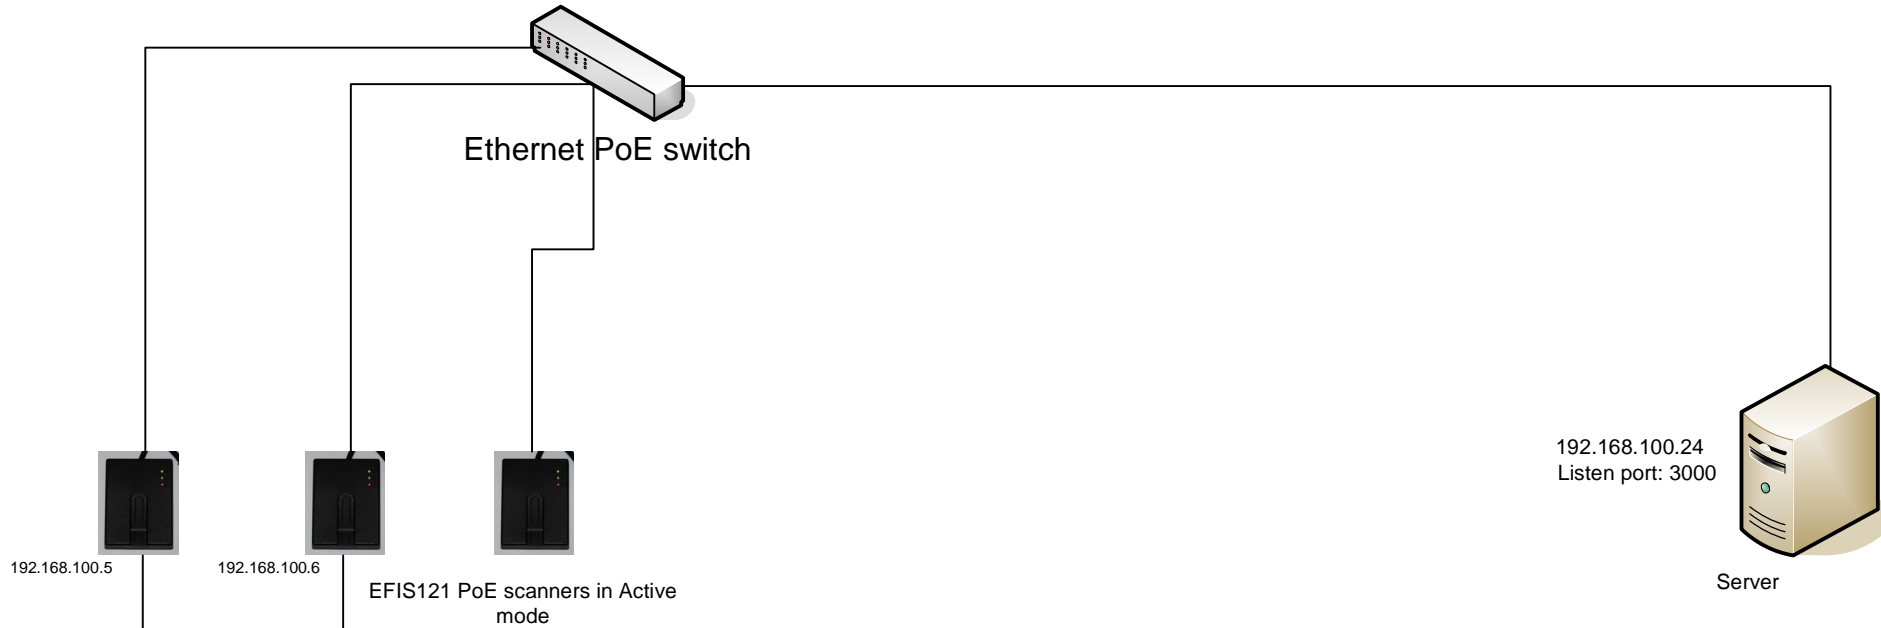

EFIS121 v3.0 configuration utility

Connect to IP: 192.168.100.5 Port: 5000 [Read]

MAC: 08:dc:1:2:3 [Write]

IP address: 192.168.100.5 Port: 5000

Gateway: 192.168.100.1 Version: ver:10082015/8/3/0002 [Reboot]

Mask: 255.255.255.0

IP Server: 192.168.100.24 Port: 3000 [Exit]

Device mode: Passive mode (Server) Active mode (Client)

Web Access Timeout: 10 Device ID: 1055

Type of device: EFIS Code of device: 121 Version: 3 8

IFS EPFL Data production: 15 10 2015

Properties of image: Atmel Threshold of finger detection: 1200

Type of sensor: BMF Fingerprint Contactless optic Temp. Low: 44 Temp. High: 45

Image width: 280 Fingerprint image: Frames Whole image

Image height: 440

Firmware: efis121 bin [Update] WEB: efis121.web [Update]

EFIS121 v3.0 configuration utility

Connect to IP: 192.168.100.6 Port: 5000 [Read]

MAC: 08:dc:1:2:4 [Write]

IP address: 192.168.100.6 Port: 5000

Gateway: 192.168.100.1 Version: ver:10082015/8/3/0002 [Reboot]

Mask: 255.255.255.0

IP Server: 192.168.100.24 Port: 3000 [Exit]

Device mode: Passive mode (Server) Active mode (Client)

Web Access Timeout: 10 Device ID: 1056

Type of device: EFIS Code of device: 121 Version: 3 8

IFS EPFL Data production: 15 10 2015

Properties of image: Atmel Threshold of finger detection: 1200

Type of sensor: BMF Fingerprint Contactless optic Temp. Low: 44 Temp. High: 45

Image width: 280 Fingerprint image: Frames Whole image

Image height: 440

Firmware: efis121 bin [Update] WEB: efis121.web [Update]